

The clean, contemporary shape complements any kitchen design. Impressive lighting and superior smoke and odor removal are a mere introduction to everything this hood has to offer.

SIZE	BLACK	WHITE	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
24 in.	---	BCS324WWC	BCS324SSC	HPFAMM24 (Type B1)	HPF24 (Type Xb)
30 in.	BCS330BLC	BCS330WWC	BCS330SSC	HPFAMM30 (Type C1)	HPF30 (Type Xc)

HVI PERFORMANCE									
Duct Orientation	Size	Damper	Sones			CFM			
			Normal	Medium*	High	Normal	Medium*	High 0.25 in. w.g.	High 0.1 in. w.g.
Vertical - Rectangular	3¼ in. x 10 in.	Included	1.5	3.0	5.0	130	180	125	220
Horizontal - Rectangular	3¼ in. x 10 in.	Included	1.5	3.0	5.0	110	150	115	210
Round - Vertical	7 in.	Sold Separately	1.5	3.0	5.0	140	190	100	240

FEATURES	
Control type	2-speed Rocker
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
ADA Capable	yes
Lighting	2-level 50 W Halogen (bulbs not included)
Grease Filters	Micro Mesh (Qty. 2)
Installation Hardware	Standard
ENERGY STAR®	no
Recirculation	Non-ducted filters sold separately



AC INPUT	
120 V, 60 Hz - 1.4 AMPS	

OPTIONAL ACCESSORIES	
7-in. Round Damper	BP87Q
7-in. Round Adapter Plate	SR680508
Make-up Air Dampers	MD6TU, MD8TU and MD10TU

MOUNTING HEIGHT	
18 in. to 24 in. from cooktop to bottom of hood	

LIMITED WARRANTY	
1-year (See installation manual for full warranty text.)	

FOR INDOOR USE ONLY

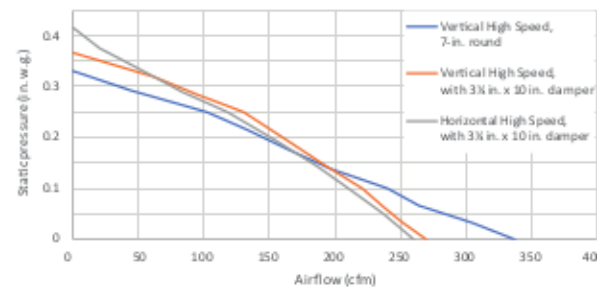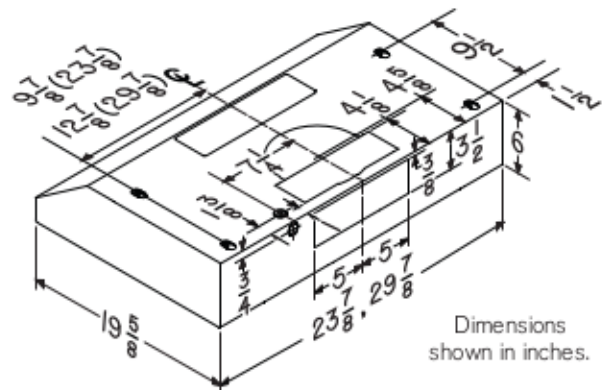

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

*Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.

99045738G

