


LED BACK LIT PANELS - MULTI WATTAGE/MULTI VOLT/MULTI CCT



DIMENSIONS

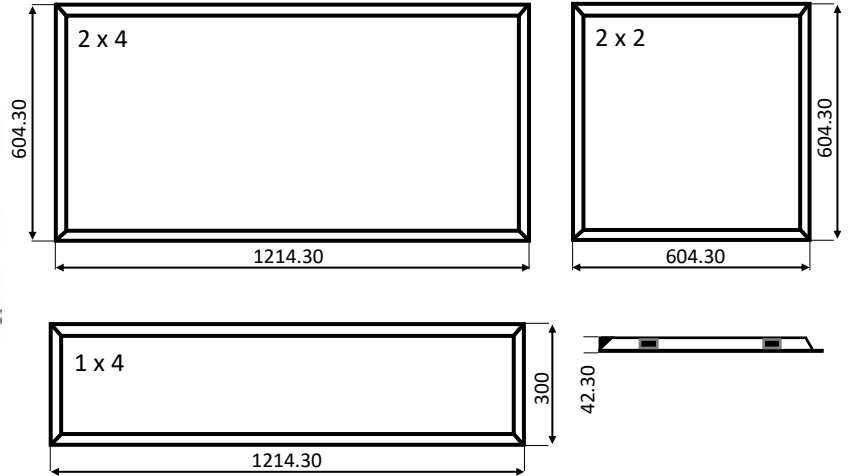

Low profile, for new or replacement installation of fluorescent fixtures in suspended ceiling. No bulbs to replace. Approved for insulated ceilings. Non-yellowing PMMA lens. Surface Mount Kits available for each size panel (sold separately).

TECHNICAL DATA

DIMMING	Isolated 0-10V dimming input signal, meet UL8750 SF3 requirement
LENS	High-transmission, diffuse lens with excellent distribution and uniformity
BACK PLATE	39.5mm height with stable performance
ETL	Suitable for damp location (For indoor use) - IC rated
LIFESPAN	50,000H LED rated life based on IES LM-80 Result and TM-21 results

MODEL	SIZE	WATTAGE	LUMEN	CCT	VOLTAGE	DIM	CRI	LIFETIME	PF
80182	1 x 4	20	2500	3500K	120-347	YES	80	50,000	0.9
		30	3750	4000K					
		40	5000	5000K					
80186	2 X 2	20	2500	3500K	120-347	YES	80	50,000	0.9
		30	3750	4000K					
		40	5000	5000K					
80188	2 X 4	30	3750	3500K	120-347	YES	80	50,000	0.9
		40	5000	4000K					
		50	6250	5000K					

APPROVAL FILE NUMBERS

ETL 4008363
 DLC S-5W1OZB (80182) / S-WU2BQS (80186) / S-TDNOJK (80188)
 Conforms to UL STD. 1598
 Certified to CSA STD. C22.2 No. 250.0

